




ZERO TECHNOLOGIES CO., LTD

website: www.zerohvacr.com

E-mail: info@zerohvacr.com

Phone: 86-0756-3353530

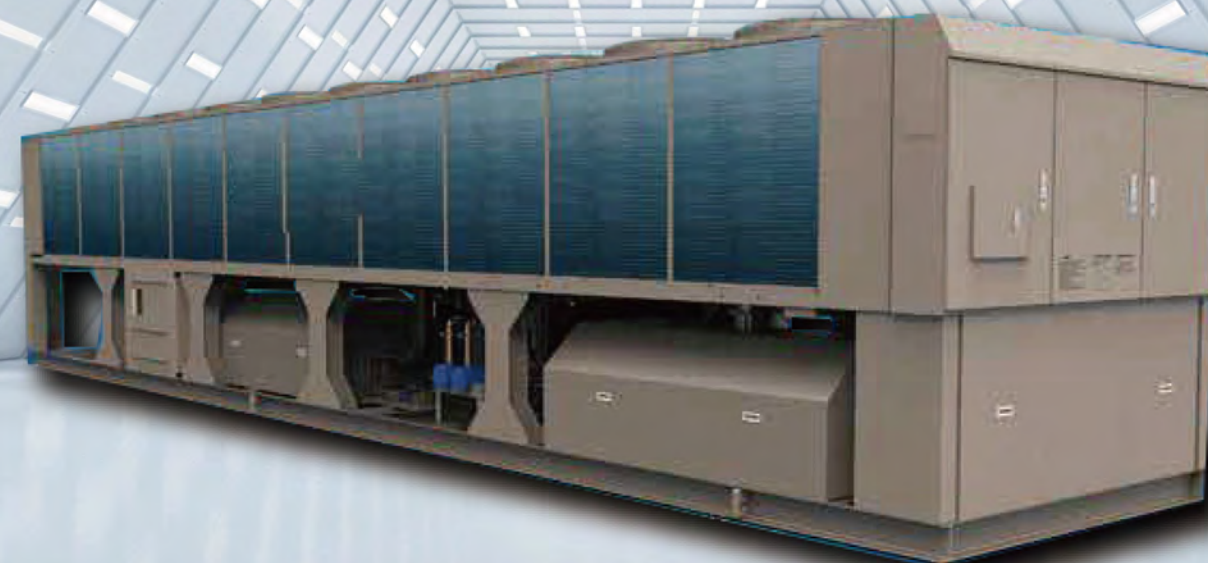

AirBoost

Air Cooled Screw Chiller


INVERTER

Overview


AirBoost air cooled screw chiller is designed to realize peak efficiency under all operating conditions, all year round cooling, free cooling, quick start and low noise operation.

It can be widely used in large and medium-sized commercial, civil or industrial buildings and is ideal for data centers, cold storages, temperature sensitive operations such as pharmaceutical labs, hospitals, and manufacturing facilities require constant cooling for equipment and processes, places where the chillers will probably be installed near noise sensitive places such as guest room and meeting room, etc.

Nomenclature

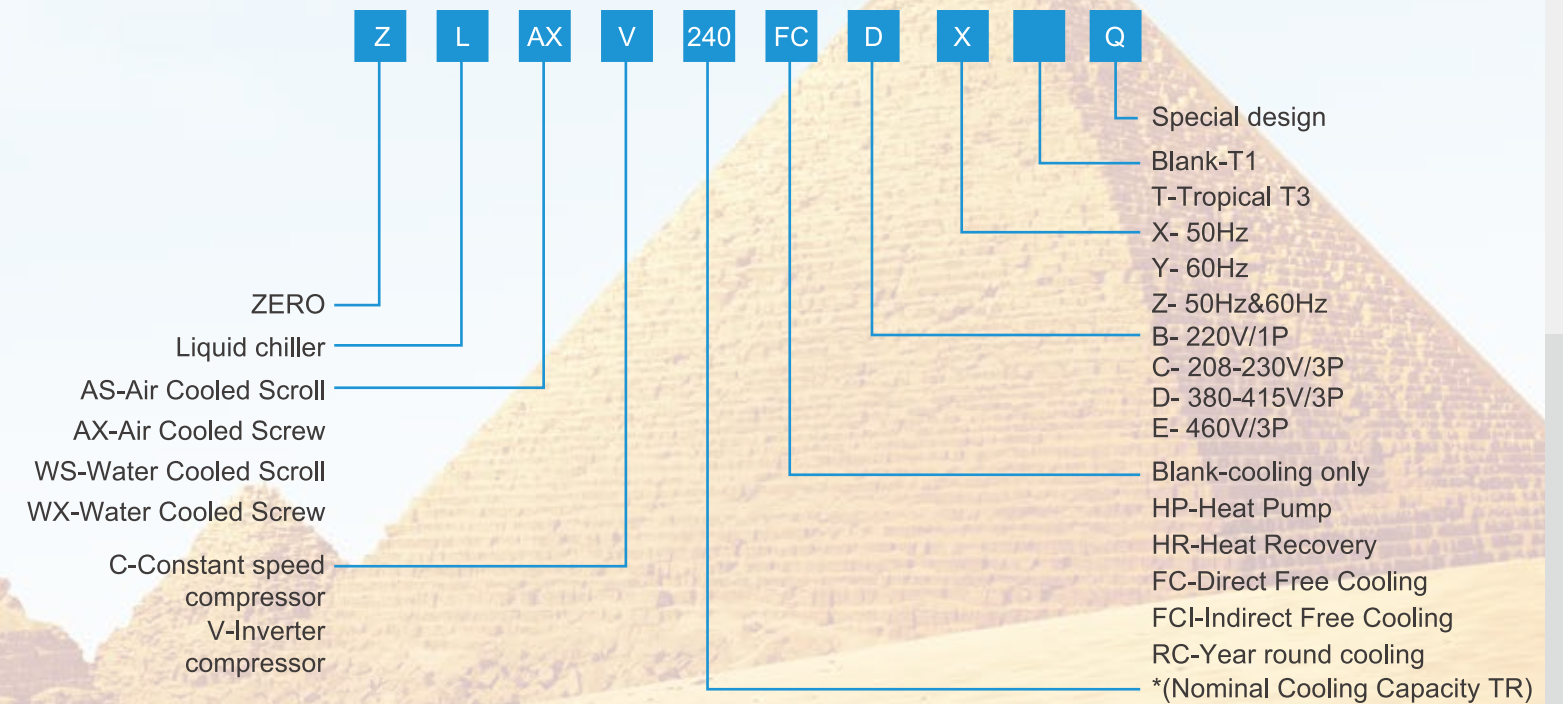

Unit member

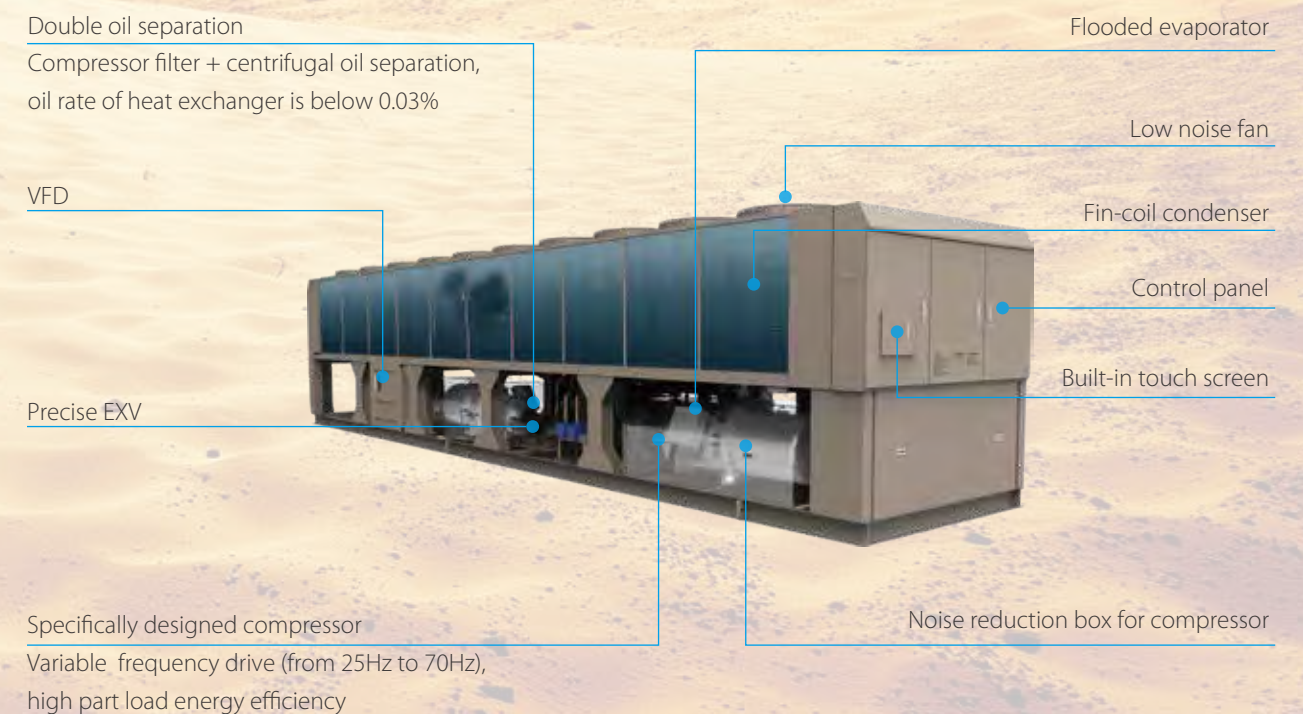

Content

02 Overview

03 Features

07 Specifications

13 Dimensions and base diagrams

18 Installation and maintenance

19 Options

20 Intelligent management

Features


High efficiency screw compressor



- ❖ The screw rotor adopts the optimized compression process profile design, not only ensures excellent volume efficiency, but also reduces the leakage of the compressor. The twin screw rotor adopts five teeth to six teeth asymmetrical design, the machining accuracy is as high as micron level, stable and reliable.
- ❖ Refrigerant cooled large capacity inverter motor design, high motor efficiency. The screw rotor is driven by motor directly, less moving parts and wearing parts, high mechanical efficiency.
- ❖ The compressor is specifically designed to run with the newest variable frequency technology. Running freely from 25Hz to 70Hz, high part load energy efficiency.


High efficiency air side heat exchanger

- ❖ High efficiency and low noise axial flow fan. The fan impeller design is optimized by professional flow field software to ensure that the impeller has good aerodynamic performance, which ensures that the fan operates with low noise and at the same time obtains larger air volume and improves the heat transfer effect of the air side.
- ❖ Inverted M-type air-side heat exchanger, the airflow is evenly distributed to achieve high efficiency heat exchange.
- ❖ High efficiency inner-threaded pipes and high quality arc-shaped window aluminum fins are closely combined by mechanical expansion pipe to improve heat transfer efficiency, reduce pressure loss and wind noise.
- ❖ Professional temperature field simulation, optimized design.



High efficiency flooded evaporator

- ❖ The refrigerant distributor can distribute refrigerant evenly, optimize the temperature field and improve the evaporation temperature, so as to improve the operating efficiency.
- ❖ Specially designed baffle plate to avoid the compressor suction with liquid, improving the reliability of the unit.
- ❖ The water box at both ends can be disassembled to facilitate maintenance.

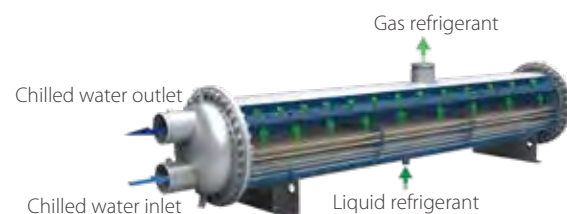

High precision EXV

- ❖ Internationally renowned brands, stable and reliable quality.
- ❖ Responsive, no hysteresis, improve unit energy efficiency.
- ❖ PID high-precision adjustment to ensure that the whole situation is stable and efficient operation.



High precision EXV



VS



Traditional thermal expansion valve


0.1Hz inverter technology

- ❖ International leading inverter regulation technology can achieve 0.1Hz frequency regulation, so as to achieve high-precision water temperature control, trend prediction, self-diagnosis, advance regulation, avoid frequent temperature fluctuations and even shutdown, improve user comfort and reduce energy consumption.




Zero in-rush current

- ❖ The unit adopts inverter starting mode, which produces zero in-rush current during the starting process and enables a stable operation from 0A to FLA.

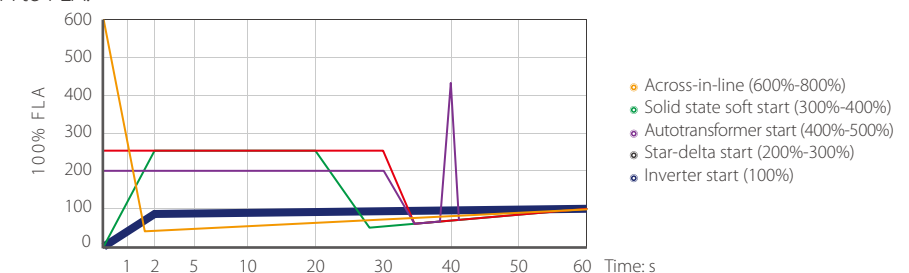

Quick start

- ❖ It takes only 180s to return to 100% capacity while other comparable chillers need at least 300s to reach full load. Ideal for temperature sensitive applications such as data centers, manufacturing processes and hospitals where need the unit to restart quickly after a power failure.

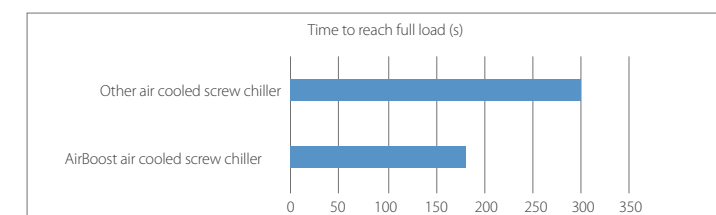

Reliable and easy installation

- ❖ Modular design, maximum 8 units can be combined.
- ❖ Each unit adopts 1 or 2 compressors and each compressor is equipped with an independent refrigeration circuit.
- ❖ The compressors of the 2-circuit unit can be used as backup for each other. The running time of each compressor of a 2-circuit unit and each unit in a whole system can both be balanced and the service life of the whole system is extended.
- ❖ No need for a dedicated equipment room or purchase cooling tower and other accessories.

Quiet operation

- ❖ Optimized system design, eliminate abnormal noise caused by flow.
- ❖ 5~10dBA noise reduction (standard with sound insulation box and low noise fan).
- ❖ Double layer sound insulation material + super low noise fan (customized).



The inner wall of the box is made of highly effective silencing materials




Super low noise solution fan

Eco-friendly

R134a refrigerant has zero ozone depletion potential and has no elimination cycle for now.
The refrigerant complies with the Montreal Protocol.

Wide ambient temperature range

The unit can operate stably under extreme conditions, ranging from -25°C to 52°C.

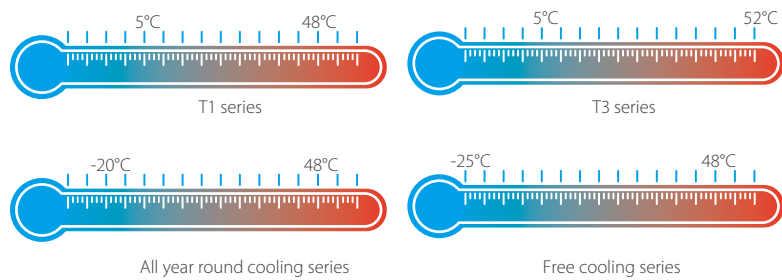

Intelligent control

- ❖ 7-inch colorful touch screen.
- ❖ Real-time operating parameters (temperature, pressure etc.) display.
- ❖ Three-level password setting to prevent misoperation.
- ❖ Detailed fault information record.
- ❖ Power-off memory function.
- ❖ Timed ON/OFF.
- ❖ Master & Slave, Back-up, Duty cycling.
- ❖ Compatible with Chiller Plant Control




Free cooling solutions

For industrial or civil applications where cooling capacity required is stable in any outdoor condition and it is not effected by outdoor temperature, using solutions that exploit low outdoor temperatures for supplying cooling capacity for free is strongly suggested.


When the outdoor temperature is lower than the temperature of the system's return water, the free cooling system recovers cold from the external environment and reduces the operation of the compressors until they stop completely.

ZERO solution is: Built-in free cooling heat exchanger, less space; Free cooling and compressor refrigeration sharing a set of fans, energy saving and easy maintenance.

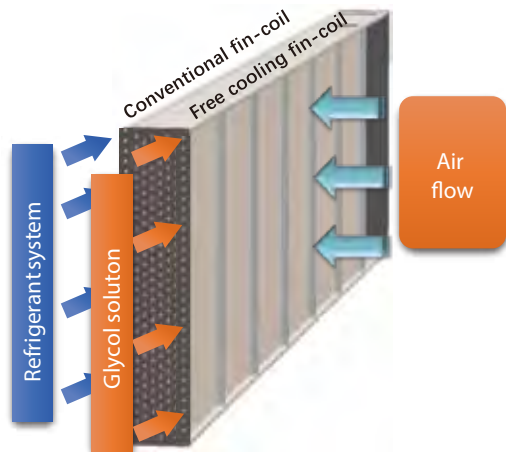


Two configurations

- ❖ **Direct free cooling**
Circulating water in the project system is with glycol.
Free cooling fin + electric three-way valve, achieve free cooling at low ambient temperature.
Direct heat exchange, high heat exchange efficiency.
Overall project circulating water is anti-freeze liquid, strong anti-freezing ability.
Client requires consideration of glycol system design.

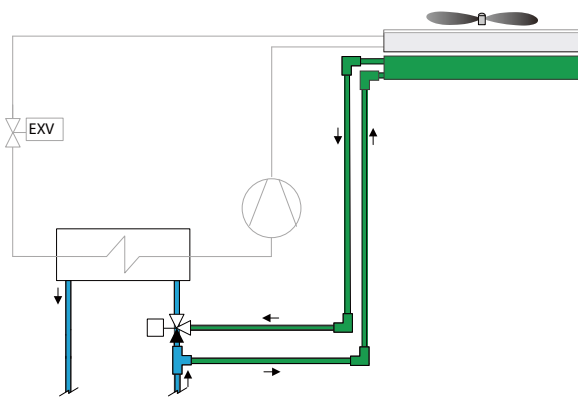

- ❖ **Indirect free cooling**
Circulating water in the project system is conventional water.
Free cooling fin, plate heat exchanger and glycol circulating pump to form a closed system.
Equipped with plate heat exchanger, transfer free cooling energy to the whole project.
The terminal system and the water pump do not need to consider the performance attenuation and water resistance increase caused by antifreeze liquid.
Two-stage heat exchange can reduce heat exchange requirements of the compressor.
No need for special water system design.

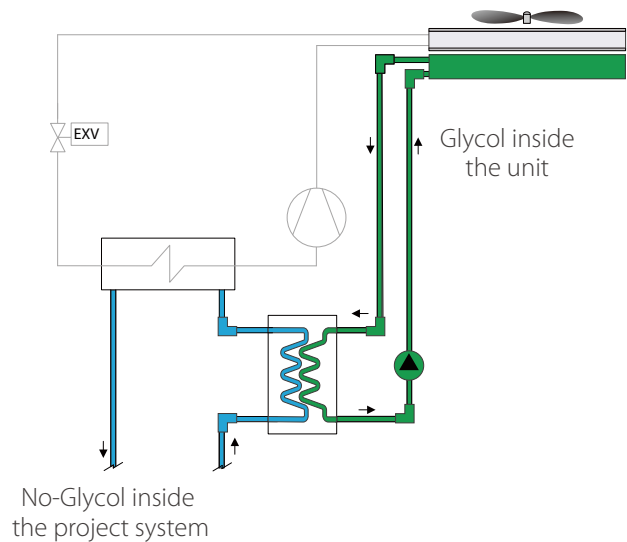

Three operating modes

Summer	Middle season	Winter
Free cooling is off. Compression cycle is on.	Free cooling is on. Compression cycle is on.	Free cooling is on. Compression cycle is off.

Specifications

380V-3Ph-50Hz

T1 series, ZLAXV***DX		Model	115	140	175	205	240	275	330	385	410
T3 series, ZLAXV***DXT		Model	115	140	175	205	240	275	330	385	410
All year round cooling series, ZLAXV***RCDX		Model	115	140	175	205	240	275	330	385	410
Nominal parameter	Cooling capacity	kW	397.0	493.0	618.1	723.8	844.5	965.0	1162	1368	1448
	Power input	kW	116.5	143.6	181.3	212.3	247.5	283.7	340.3	401.2	425.0
	Cooling COP	kW/kW	3.40	3.43	3.40	3.40	3.41	3.40	3.41	3.41	3.40
	IPLV	kW/kW	4.992	5.054	5.019	5.018	4.986	4.984	4.979	4.971	5.069
Compressor	Type	/	Semi-hermetic twin-rotor screw compressor								
	Quantity	/	1	1	1	1	1	1	2	2	2
Energy regulation mode		/	Stepless control (Single compressor 10%-100% , Dual compressor 5%-100%)								
Refrigerant	Type	/	R134a								
	Charge amount	kg	126	148	168	192	225	280	2×168	2×200	2×200
Power supply		/	380V-3Ph-50Hz								
Rated current		A	192.4	238.8	302.7	350.7	414.5	474.2	565.3	668.4	720.4
Start current		A	≤192.4	≤238.8	≤302.7	≤350.7	≤414.5	≤474.2	≤565.3	≤668.4	≤720.4
Max. operating current		A	264.6	329.8	392.3	449.9	524.8	595.3	756.0	841.6	886.6
Air side heat exchanger	Type	/	Fin-coil								
	No. of fan	/	6	8	10	12	14	16	18	20	20
	Moter power input	kW	2.0								
Water side heat exchanger	Type	/	Shell and tube								
	Water flow	m³/h	68.28	84.79	106.3	124.5	145.3	166.0	199.8	235.3	249.1
	Water side pressure drop	kPa	42.2	43.8	73.0	68.9	80.2	72.7	75.6	73.9	75.3
	Water pipe connection	mm	DN150	DN150	DN150	DN150	DN150	DN200	DN200	DN200	DN200
	Max. working pressure	MPa	1.0								
Unit dimensions	Length	mm	4440	5240	6245	7250	8255	9260	10265	11270	11270
	Width	mm	2300	2300	2300	2300	2300	2300	2300	2300	2300
	Height	mm	2460	2460	2460	2460	2460	2460	2460	2460	2460
Unit weight		kg	4240	4950	5500	6170	7050	7600	9800	10980	10980
Operating weight		kg	4440	5150	5720	6410	7330	7940	10160	11380	11380

- Note:
1. Cooling: chilled water outlet temperature 7°C, water flow=cooling capacity×0.172m³/(h·kW), fouling factor=0.018 m²·°C/kW, outdoor ambient temperature 35° C DB.
 2. IPLV calculations according to standard performances (in accordance with **AHRI** 550/590).
 3. As a result of the continuous improvement of the product, the above parameters may be changed, please refer to the product nameplate and in-kind.
 4. **ZLAXV* **FCDXQ** and **ZLAXV* **FCDXQ** series are certified.

380V-3Ph-50Hz

Direct free cooling series, ZLAXV***FCDX		Model	115	140	175	205	240	275	330	395
Nominal parameter	Cooling capacity	kW	397.0	493.0	618.1	723.8	844.5	965.0	1162	1393
	Power input	kW	123.6	153.9	192.0	224.8	256.4	300.8	353.2	433.9
	Cooling COP	kW/kW	3.21	3.20	3.21	3.21	3.29	3.21	3.28	3.21
	IPLV	kW/kW	4.665	4.756	4.724	4.723	4.693	4.691	4.686	4.761
Free cooling only parameter	Cooling capacity	kW	397.0	493.0	618.1	723.8	844.5	965.0	1162	1393
	Power input	kW	20.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0
	COP	kW/kW	19.85	24.65	24.72	24.12	24.12	24.12	25.82	27.86
Ambient temperature of free cooling only		℃	-0.63	-0.21	-0.13	0.05	0.10	0.04	-0.42	-1.02
Free cooling only heat exchange temperature difference		℃	7.63	7.21	7.13	6.95	6.90	6.96	7.42	8.02
Compressor	Type	/	Semi-hermetic twin-rotor screw compressor							
	Quantity	/	1	1	1	1	1	1	2	2
Energy regulation mode		/	Stepless control (Single compressor 10%-100% , Dual compressor 5%-100%)							
Refrigerant	Type	/	R134a							
	Charge amount	kg	126	148	168	192	225	280	2×168	2×185
Power supply		/	380V-3Ph-50Hz							
Rated current		A	203.9	253.9	316.8	370.9	423.1	496.3	582.8	715.9
Start current		A	≤203.9	≤253.9	≤316.8	≤370.9	≤423.1	≤496.3	≤582.8	≤715.9
Max. operating current		A	273.6	338.8	403.6	463.4	540.6	613.3	776.3	909.1
Air side heat exchanger	Type	/	Fin-coil							
	No. of fan	/	8	8	10	12	14	16	18	20
	Motor power input	kW	2.5							
Water side heat exchanger	Type	/	Shell and tube							
	Water flow	m³/h	68.28	84.79	106.3	124.5	145.3	166.0	199.8	239.6
	Water side pressure drop	kPa	42.2	43.8	73.0	68.9	80.2	72.7	75.6	70.4
	Pressure drop (free cooling is on)	kPa	98	117	152	167	174	186	198	242
	Water pipe connection	mm	DN150	DN150	DN150	DN150	DN150	DN200	DN200	DN200
	Max. working pressure	MPa	1.0							
Unit dimensions	Length	mm	5440	5240	6245	7250	8255	9260	10265	11270
	Width	mm	2300	2300	2300	2300	2300	2300	2300	2300
	Height	mm	2460	2460	2460	2460	2460	2460	2460	2460
Unit weight		kg	5400	6030	6580	7350	8500	8930	11380	12350
Operating weight		kg	5650	6300	6870	7680	8890	9340	11830	12800

- Note:
1. Nominal parameter refers to the following conditions: chilled water outlet temperature 7°C, water flow=cooling capacity×0.172m³/(h·kW), fouling factor=0.018 m²·°C/kW, outdoor ambient temperature 35°C DB.
 2. Free cooling parameter refers to the following conditions: outdoor ambient temperature=ambient temperature of free cooling only, chilled water outlet temperature 7° C, water flow=cooling capacity×0.172m³/(h·kW), fouling factor=0.018 m²·°C/kW.
 3. IPLV calculations according to standard performances (in accordance with **AHRI** 550/590).
 4. As a result of the continuous improvement of the product, the above parameters may be changed, please refer to the product nameplate and in-kind.

380V-3Ph-50Hz

Indirect free cooling series, ZLAXV***FCIDX		Model	115	140	175	205	240	275	330	395
Nominal parameter	Cooling capacity	kW	397.0	493.0	618.1	723.8	844.5	965.0	1162	1393
	Power input	kW	123.6	153.9	192.0	224.8	256.4	300.8	353.2	433.9
	Cooling COP	kW/kW	3.21	3.20	3.21	3.21	3.29	3.21	3.28	3.21
	IPLV	kW/kW	4.665	4.756	4.724	4.723	4.693	4.691	4.686	4.761
Free cooling only parameter	Cooling capacity	kW	397.0	493.0	618.1	723.8	844.5	965.0	1162	1393
	Power input	kW	26.2	31.0	36.0	44.5	53.0	58.0	72.0	84.0
	COP	kW/kW	15.15	15.90	17.16	16.26	15.93	16.63	16.13	16.58
Ambient temperature of free cooling only		°C	-3.54	-3.25	-3.19	-2.95	-2.97	-2.93	-3.41	-3.81
Free cooling only heat exchange temperature difference		°C	10.54	10.25	10.19	9.95	9.97	9.93	10.41	10.81
Compressor	Type	/	Semi-hermetic twin-rotor screw compressor							
	Quantity	/	1	1	1	1	1	1	2	2
Energy regulation mode		/	Stepless control (Single compressor 10%-100% , Dual compressor 5%-100%)							
Refrigerant	Type	/	R134a							
	Charge amount	kg	126	148	168	192	225	280	2×168	2×185
Power supply		/	380V-3Ph-50Hz							
Rated current		A	203.9	253.9	316.8	370.9	423.1	496.3	582.8	715.9
Start current		A	≤203.9	≤253.9	≤316.8	≤370.9	≤423.1	≤496.3	≤582.8	≤715.9
Max. operating current		A	273.6	338.8	403.6	463.4	540.6	613.3	776.3	909.1
Air side heat exchanger	Type	/	Fin-coil							
	No. of fan	/	8	8	10	12	14	16	18	20
	Motor power input	kW	2.5							
Water side heat exchanger	Type	/	Shell and tube							
	Water flow	m³/h	68.28	84.79	106.3	124.5	145.3	166.0	199.8	239.6
	Pressure drop	kPa	77	88	114	115	132	134	143	155
	Water pipe connection	mm	DN150	DN150	DN150	DN150	DN150	DN200	DN200	DN200
	Max. working pressure	MPa	1.0							
Unit dimensions	Length	mm	6445	6445	6445	7250	8255	9260	10265	11270
	Width	mm	2300	2300	2300	2300	2300	2300	2300	2300
	Height	mm	2460	2460	2460	2460	2460	2460	2460	2460
Unit weight		kg	6420	7130	8320	9200	10230	10920	14350	15440
Operating weight		kg	6670	7400	8610	9530	10620	11330	14800	15890

- Note:
1. Nominal parameter refers to the following conditions: chilled water outlet temperature 7°C, water flow=cooling capacity×0.172m³/(h·kW), fouling factor=0.018 m²·°C/kW, outdoor ambient temperature 35°C DB.
 2. Free cooling parameter refers to the following conditions: outdoor ambient temperature=ambient temperature of free cooling only, chilled water outlet temperature 7° C, water flow=cooling capacity×0.172m³/(h·kW), fouling factor=0.018 m²·°C/kW.
 3. IPLV calculations according to standard performances (in accordance with **AHRI** 550/590).
 4. As a result of the continuous improvement of the product, the above parameters may be changed, please refer to the product nameplate and in-kind.

460V-3Ph-60Hz

T1 series, ZLAXV***EY		Model	115	140	175	205	240	275	330	385	410
T3 series, ZLAXV***EYT		Model	115	140	175	205	240	275	330	385	410
All year round cooling series, ZLAXV***RCEY		Model	115	140	175	205	240	275	330	385	410
Nominal parameter	Cooling capacity	kW(Ton)	397.0(112.9)	493.0(140.2)	618.1(175.8)	723.8(205.9)	844.5(238.5)	965.0(274.6)	1162(330.4)	1368(389.0)	1448(411.9)
	Power input	kW	116.5	143.6	181.3	212.3	247.5	283.7	340.3	401.2	425.0
	Cooling COP	kW/kW (kW/Ton)	3.40(1.031)	3.43(1.024)	3.40(1.031)	3.40(1.031)	3.41(1.030)	3.40(1.034)	3.41(1.030)	3.41(1.031)	3.40(1.032)
	IPLV	kW/kW (kW/Ton)	4.992(0.7043)	5.054(0.6957)	5.019(0.7006)	5.018(0.7006)	4.986(0.7051)	4.984(0.7054)	4.979(0.7061)	4.971(0.7073)	5.069(0.6937)
Compressor	Type	/	Semi-hermetic twin-rotor screw compressor								
	Quantity	/	1	1	1	1	1	1	2	2	2
Energy regulation mode		/	Stepless control (Single compressor 10%-100% , Dual compressor 5%-100%)								
Refrigerant	Type	/	R134a								
	Charge amount	kg(lb)	126(278)	148(326)	168(370)	192(423)	225(496)	280(617)	2×168(2×370)	2×185(2×408)	2×200(2×441)
Power supply		/	460V-3Ph-60Hz								
Rated current		A	159.0	200.1	250.0	289.7	342.4	391.8	465.2	552.1	595.1
Start current		A	≤159.0	≤200.1	≤250.0	≤289.7	≤342.4	≤391.8	≤465.2	≤552.1	≤595.1
Max.operating current		A	218.6	287.1	324.1	371.7	433.6	491.8	683.8	347.6/347.6	366.2/366.2
Air side heat exchanger	Type	/	Fin-coil								
	No. of fan	/	6	8	10	12	14	16	18	20	20
	Moter power input	kW	2.0								
Water side heat exchanger	Type	/	Shell and tube								
	Water flow	m³/h (GPM)	68.28(250)	84.79(310)	106.3(390)	124.5(456)	145.3(533)	166.0(609)	199.8(730)	235.3(863)	249.1(913)
	Water side pressure drop	kPa (ftH ₂ O)	42.2(14.1)	43.8(14.6)	73.0(24.4)	68.9(23.1)	80.2(26.8)	72.7(24.3)	75.6(25.3)	73.9(24.7)	75.3(25.2)
	Water pipe connection	mm(in)	150(5.9)	150(5.9)	150(5.9)	150(5.9)	150(5.9)	200(7.9)	200(7.9)	200(7.9)	200(7.9)
	Max. working pressure	MPa	1.0								
Unit dimensions	Length	mm(in)	4440(174.8)	5240(206.3)	6245(245.9)	7250(285.4)	8255(325.0)	9260(364.6)	10265(404.1)	11270(443.7)	11270(443.7)
	Width	mm(in)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)
	Height	mm(in)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)
Unit weight		kg(lb)	4240(9348)	4950(10913)	5500(12125)	6170(13603)	7050(15543)	7600(16760)	9800(21605)	10980(24207)	10980(24207)
Operating weight		kg(lb)	4440(9789)	5150(11354)	5720(12610)	6410(14132)	7330(16160)	7940(17510)	10160(22399)	11380(25089)	11380(25089)

- Note:
1. Cooling: chilled water outlet temperature 7°C, water flow=cooling capacity×0.172m³/(h·kW), fouling factor=0.018 m²·°C/kW, outdoor ambient temperature 35° C DB.
 2. IPLV calculations according to standard performances (in accordance with **AHRI** 550/590).
 3. As a result of the continuous improvement of the product, the above parameters may be changed, please refer to the product nameplate and in-kind.
 4. **ZLAXV* **FCEY** and **ZLAXV* **FCEY** series are certified.

460V-3Ph-60Hz

Direct free cooling series, ZLAXV***FCEY		Model	115	140	175	205	240	275	330	395
Nominal parameter	Cooling capacity	kW(Ton)	397.0(112.9)	493.0(142.4)	618.1(175.8)	723.8(205.9)	844.5(238.5)	965.0(274.6)	1162(329.4)	1393(396.2)
	Power input	kW	121.4	156.4	192.0	224.8	254.8	300.8	352.0	434.7
	Cooling COP	kW/kW (kW/Ton)	3.21(1.09)	3.20(1.10)	3.21(1.09)	3.21(1.09)	3.29(1.07)	3.21(1.10)	3.28(1.07)	3.21(1.10)
	IPLV	kW/kW (kW/Ton)	4.665(0.756)	4.756(0.742)	4.724(0.747)	4.723(0.747)	4.693(0.752)	4.691(0.752)	4.686(0.757)	4.761(0.744)
Free cooling only parameter	Cooling capacity	kW(Ton)	397.0(112.9)	493.0(142.4)	618.1(175.8)	723.8(205.9)	844.5(238.5)	965.0(274.6)	1162(329.4)	1393(396.2)
	Power input	kW	20.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0
	COP	kW/kW (kW/Ton)	19.85(0.18)	24.65(0.14)	24.72(0.14)	24.12(0.15)	24.12(0.15)	24.12(0.15)	25.82(0.14)	27.86(0.13)
Ambient temperature of free cooling only		°C	2.37	2.79	2.87	3.05	3.10	3.04	2.58	1.98
Free cooling only heat exchange temperature difference		°C	7.63	7.21	7.13	6.95	6.90	6.96	7.42	8.02
Compressor	Type	/	Stepless control (Single compressor 10%-100% , Dual compressor 5%-100%)							
	Quantity	/	1	1	1	1	1	1	2	2
Energy regulation mode		/	Single compressor 10%-100% , Dual compressor 5%-100%							
Refrigerant	Type	/	R134a							
	Charge amount	kg(lb)	126(278)	148(326)	168(370)	192(423)	225(496)	280(617)	2×168(2×370)	2×185(2×408)
Power supply		/	460V-3Ph-60Hz							
Rated current		A	168.4	209.7	261.7	306.4	349.5	410.0	481.4	591.4
Start current		A	≤168.4	≤209.7	≤261.7	≤306.4	≤349.5	≤410.0	≤481.4	≤591.4
Max. operating current		A	226.0	279.9	333.4	382.8	446.5	506.6	641.3	751.0
Air side heat exchanger	Type	/	Fin-coil							
	No. of fan	/	8	8	10	12	14	16	18	20
	Motor power input	kW	2.5							
Water side heat exchanger	Type	/	Shell and tube							
	Water flow	m³/h (GPM)	68.28(250)	84.79(311)	106.3(390)	124.5(456)	145.3(533)	166.0(609)	199.8(732)	239.6(878)
	Water side pressure drop	kPa (ftH ₂ O)	42.2(14.1)	43.8(14.6)	73.0(24.4)	68.9(23.0)	80.2(26.8)	72.7(24.3)	75.6(25.3)	70.4(23.5)
	Pressure drop (free cooling is on)	kPa (ftH ₂ O)	98(32.8)	117(39.1)	152(50.8)	167(55.9)	174(58.2)	186(62.2)	198(66.2)	242(81.0)
	Water pipe connection	mm(in)	150(5.9)	150(5.9)	150(5.9)	150(5.9)	150(5.9)	200(7.9)	200(7.9)	200(7.9)
	Max. working pressure	MPa	1.0							
Unit dimensions	Length	mm(in)	5440(214.2)	5240(206.3)	6245(245.9)	7250(285.3)	8255(325.0)	9260(364.6)	10265(404.1)	11270(443.7)
	Width	mm(in)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)
	Height	mm(in)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)
Unit weight		kg(lb)	5400(11905)	6030(13294)	6580(14506)	7350(16204)	8500(18739)	8930(19687)	11380(225088)	12350(27227)
Operating weight		kg(lb)	5650(12456)	6300(13889)	6870(15146)	7680(17328)	8890(19599)	9340(20591)	11830(26080)	12800(28219)

- Note:
1. Nominal parameter refers to the following conditions: chilled water outlet temperature 7°C, water flow=cooling capacity×0.172m³/(h•kW), fouling factor=0.018 m²·°C/kW, outdoor ambient temperature 35°C DB.
 2. Free cooling parameter refers to the following conditions: outdoor ambient temperature=ambient temperature of free cooling only, chilled water outlet temperature 7° C, water flow=cooling capacity×0.172m³/(h•kW), fouling factor=0.018 m²·°C/kW.
 3. IPLV calculations according to standard performances (in accordance with **AHRI** 550/590).
 4. As a result of the continuous improvement of the product, the above parameters may be changed, please refer to the product nameplate and in-kind.


460V-3Ph-60Hz

Indirect free cooling series, ZLAXV***FCIEY		Model	115	140	175	205	240	275	330	395
Nominal parameter	Cooling capacity	kW(Ton)	397.0(112.9)	493.0(142.4)	618.1(175.8)	723.8(205.9)	844.5(238.5)	965.0(274.6)	1162(329.4)	1393(396.2)
	Power input	kW	123.6	153.9	192.0	224.8	256.4	300.8	353.2	433.9
	Cooling COP	kW/kW (kW/Ton)	3.21(1.09)	3.20(1.10)	3.21(1.09)	3.21(1.09)	3.29(1.07)	3.21(1.10)	3.28(1.07)	3.21(1.10)
	IPLV	kW/kW (kW/Ton)	4.665(0.756)	4.756(0.742)	4.724(0.747)	4.723(0.747)	4.693(0.752)	4.691(0.752)	4.686(0.757)	4.761(0.744)
Free cooling only parameter	Cooling capacity	kW(Ton)	397.0(112.9)	493.0(142.4)	618.1(175.8)	723.8(205.9)	844.5(238.5)	965.0(274.6)	1162(329.4)	1393(396.2)
	Power input	kW	26.2	31.0	36.0	44.5	53.0	58.0	72.0	84.0
	COP	kW/kW (kW/Ton)	15.15(0.23)	15.90(0.22)	17.16(0.20)	16.26(0.22)	15.93(0.22)	16.63(0.21)	16.13(0.22)	16.58(0.21)
Ambient temperature of free cooling only		°C	-0.54	-0.25	-0.19	0.05	0.03	0.07	-0.41	-0.81
Free cooling only heat exchange temperature difference		°C	10.54	10.25	10.19	9.95	9.97	9.93	10.41	10.81
Compressor	Type	/	Stepless control (Single compressor 10%-100% , Dual compressor 5%-100%)							
	Quantity	/	1	1	1	1	1	1	2	2
Energy regulation mode		/	Single compressor 10%-100% , Dual compressor 5%-100%							
Refrigerant	Type	/	R134a							
	Charge amount	kg(lb)	126(278)	148(326)	168(370)	192(423)	225(496)	280(617)	2×168(2×370)	2×185(2×408)
Power supply		/	460V-3Ph-60Hz							
Rated current		A	168.4	209.7	261.7	306.4	349.5	410.0	481.4	591.4
Start current		A	≤168.4	≤209.7	≤261.7	≤306.4	≤349.5	≤410.0	≤481.4	≤591.4
Max. operating current		A	226.0	279.9	333.4	382.8	446.5	506.6	641.3	751.0
Air side heat exchanger	Type	/	Fin-coil							
	No. of fan	/	8	8	10	12	14	16	18	20
	Motor power input	kW	2.5							
Water side heat exchanger	Type	/	Shell and tube							
	Water flow	m³/h (GPM)	68.28(250)	84.79(311)	106.3(390)	124.5(456)	145.3(533)	166.0(609)	199.8(732)	239.6(878)
	Pressure drop	kPa (ftH ₂ O)	77(25.8)	88(29.4)	114(38.1)	115(38.5)	132(44.2)	134(44.8)	143(47.8)	155(51.9)
	Water pipe connection	mm(in)	150(5.9)	150(5.9)	150(5.9)	150(5.9)	150(5.9)	200(7.9)	200(7.9)	200(7.9)
	Max. working pressure	MPa	1.0							
Unit dimensions	Length	mm(in)	6445(253.7)	6445(253.7)	6445(253.7)	7250(285.3)	8255(325.0)	9260(364.6)	10265(404.1)	11270(443.7)
	Width	mm(in)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)	2300(90.6)
	Height	mm(in)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)	2460(96.9)
Unit weight		kg(lb)	6420(14154)	7130(15719)	8320(18342)	9200(20282)	10230(22553)	10920(24074)	14350(31636)	15440(34039)
Operating weight		kg(lb)	6670(14705)	7400(16314)	8610(18982)	9530(21010)	10620(23413)	11330(24978)	14800(32628)	15890(35031)


- Note:
1. Nominal parameter refers to the following conditions: chilled water outlet temperature 7°C, water flow=cooling capacity×0.172m³/(h•kW), fouling factor=0.018 m²·°C/kW, outdoor ambient temperature 35°C DB.
 2. Free cooling parameter refers to the following conditions: outdoor ambient temperature=ambient temperature of free cooling only, chilled water outlet temperature 7° C, water flow=cooling capacity×0.172m³/(h•kW), fouling factor=0.018 m²·°C/kW.
 3. IPLV calculations according to standard performances (in accordance with **AHRI** 550/590).
 4. As a result of the continuous improvement of the product, the above parameters may be changed, please refer to the product nameplate and in-kind.

Dimensions and base diagrams

Dimensions

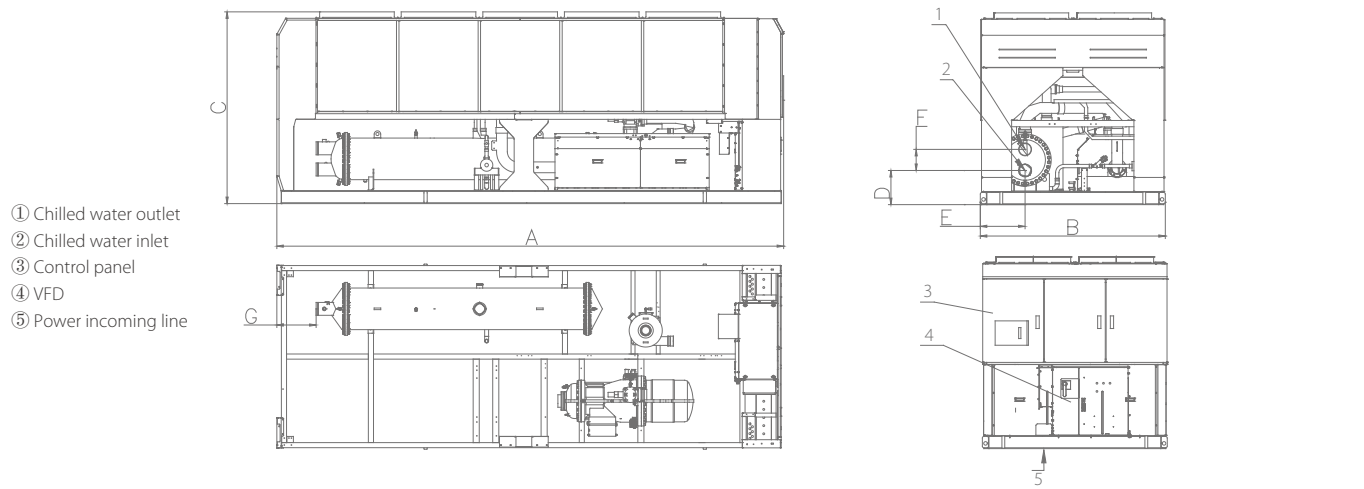


Dimensions (unit: mm)							
Model, ZLAXV	A	B	C	D	E	F	G
115, 115T, 115RC	4440	2300	2460	420	550	260	60
140 140T, 140RC	5240	2300	2460	420	550	260	65
175, 175T, 175RC	6245	2300	2460	420	550	260	405
205, 205T, 205RC	7250	2300	2460	420	550	260	1300
240, 240T, 240RC	8255	2300	2460	420	550	260	2305
275, 275T, 275RC	9260	2300	2460	420	550	300	3310

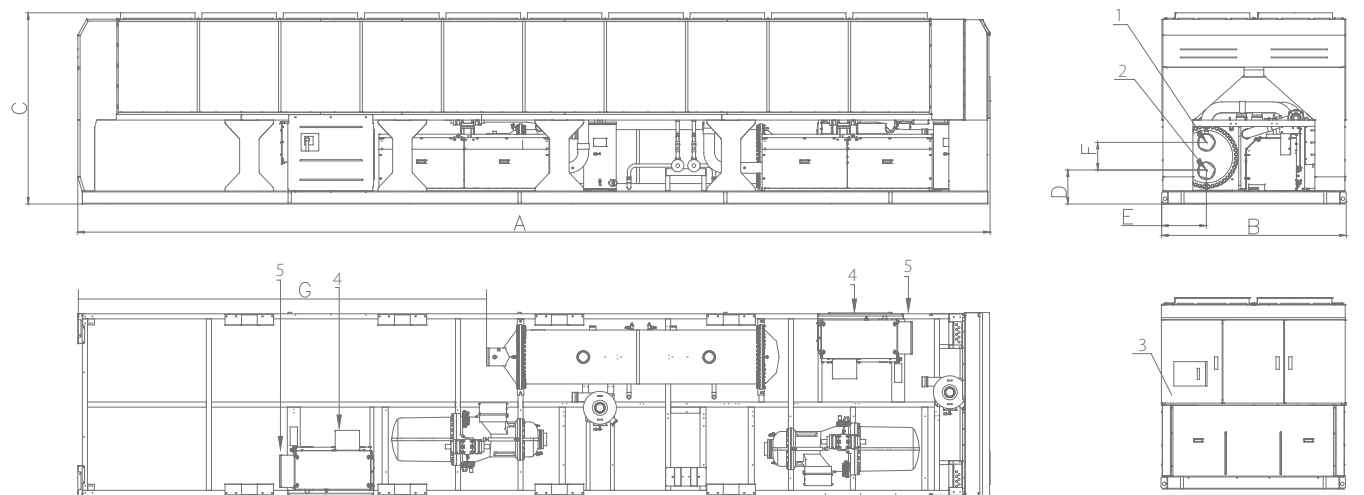

Dimensions (unit: mm)							
Model, ZLAXV	A	B	C	D	E	F	G
330, 330T, 330RC	10265	2300	2460	410	550	350	3965
385, 385T, 385RC	11270	2300	2460	410	550	350	4970
410, 410T, 410RC	11270	2300	2460	410	550	350	4970


Base diagrams

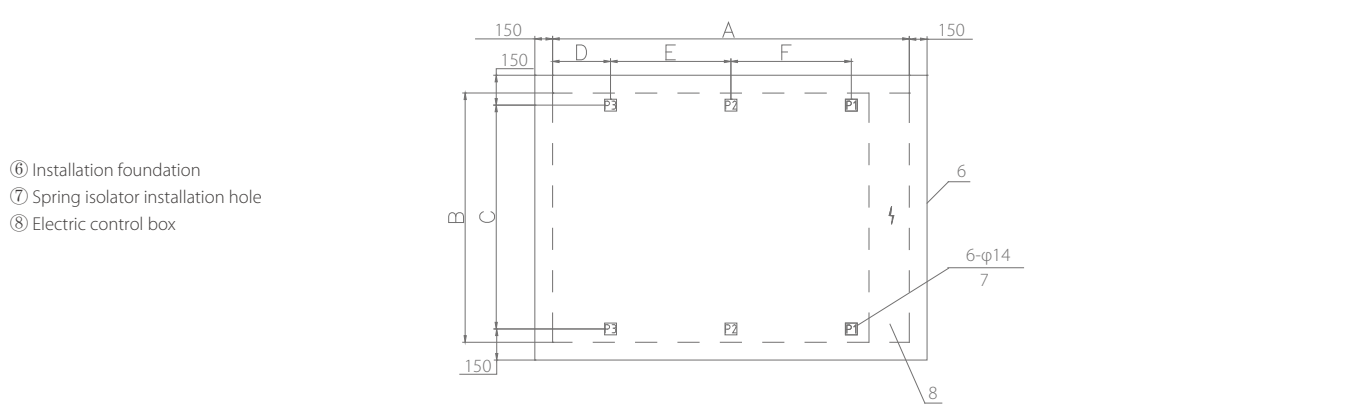

Dimensions (unit: mm)						
Model, ZLAXV	A	B	C	D	E	F
115, 115T, 115T	4440	2300	2180	600	1670	1200
140 140T, 140RC	5240	2300	2180	800	2000	1700

Spring isolator at all points			
Model, ZLAXV	P1	P2	P3
115, 115T, 115T	MHD-850	MHD-850	MHD-850
140 140T, 140RC	MHD-1050	MHD-1050	MHD-1050

Note:
1. The spring isolator is optional.
2. The value in the spring isolator model indicates the bearable weight (unit: kg). For example, "1050" in "MHD-1050" indicates 1050kg.

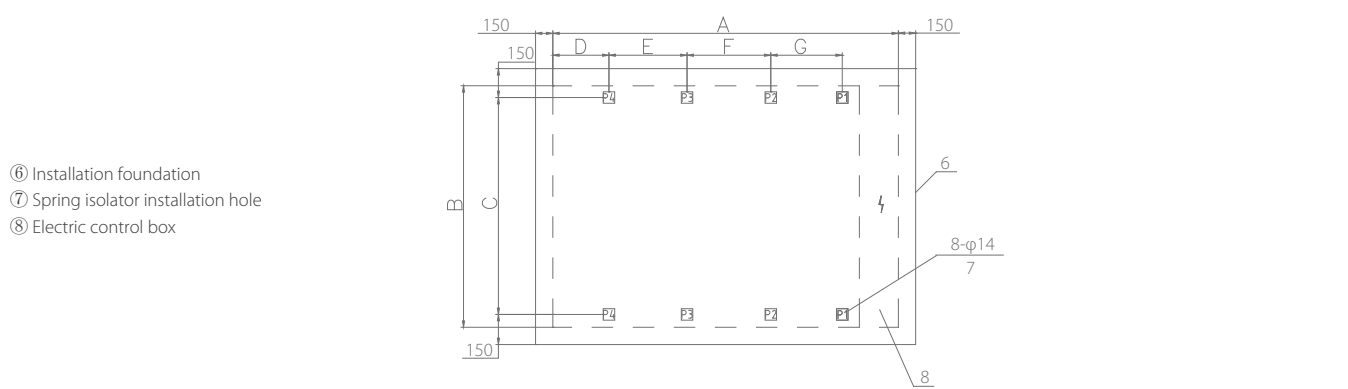


Dimensions (unit: mm)							
Model, ZLAXV	A	B	C	D	E	F	G
175, 175T, 175RC	6245	2300	2180	1080	2000	1200	1200

Spring isolator at all points				
Model, ZLAXV	P1	P2	P3	P4
175, 175T, 175RC	MHD-850	MHD-850	MHD-850	MHD-850

Note:
1. The spring isolator is optional.
2. The value in the spring isolator model indicates the bearable weight (unit: kg). For example, "1050" in "MHD-1050" indicates 1050kg.

- ⑥ Installation foundation
- ⑦ Spring isolator installation hole
- ⑧ Electric control box

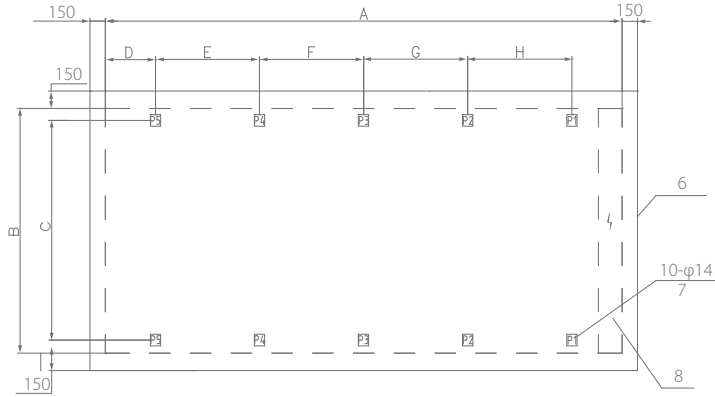


Dimensions (unit: mm)								
Model, ZLAXV	A	B	C	D	E	F	G	H
205, 205T, 205RC	7250	2300	2180	635	1800	1800	1050	1200

Spring isolator at all points					
Model, ZLAXV	P1	P2	P3	P4	P5
205, 205T, 205RC	MHD-850	MHD-850	MHD-850	MHD-850	MHD-850

- Note:
- The spring isolator is optional.
 - The value in the spring isolator model indicates the bearable weight (unit: kg). For example, "1050" in "MHD-1050" indicates 1050kg.

- ⑥ Installation foundation
- ⑦ Spring isolator installation hole
- ⑧ Electric control box

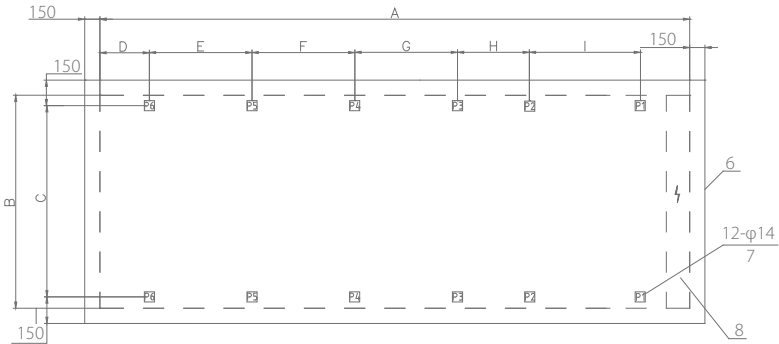


Dimensions (unit: mm)									
Model, ZLAXV	A	B	C	D	E	F	G	H	I
240, 240T, 240RC	8255	2300	2180	440	1200	1800	1800	1050	1200

Spring isolator at all points						
Model, ZLAXV	P1	P2	P3	P4	P5	P6
240, 240T, 240RC	MHD-850	MHD-850	MHD-850	MHD-850	MHD-850	MHD-850

- Note:
- The spring isolator is optional.
 - The value in the spring isolator model indicates the bearable weight (unit: kg). For example, "1050" in "MHD-1050" indicates 1050kg.

- ⑥ Installation foundation
- ⑦ Spring isolator installation hole
- ⑧ Electric control box

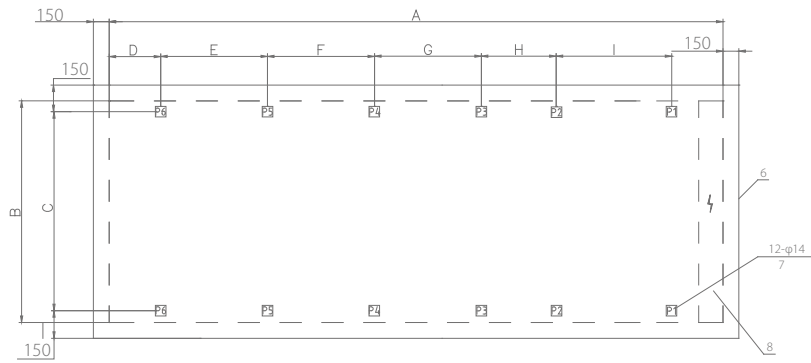


Dimensions (unit: mm)									
Model, ZLAXV	A	B	C	D	E	F	G	H	I
275, 275T, 275RC	9260	2300	2180	845	1800	1800	1800	1050	1200

Spring isolator at all points						
Model, ZLAXV	P1	P2	P3	P4	P5	P6
275, 275T, 275RC	MHD-850	MHD-850	MHD-850	MHD-850	MHD-850	MHD-850

- Note:
- The spring isolator is optional.
 - The value in the spring isolator model indicates the bearable weight (unit: kg). For example, "1050" in "MHD-1050" indicates 1050kg.

- ⑥ Installation foundation
- ⑦ Spring isolator installation hole
- ⑧ Electric control box

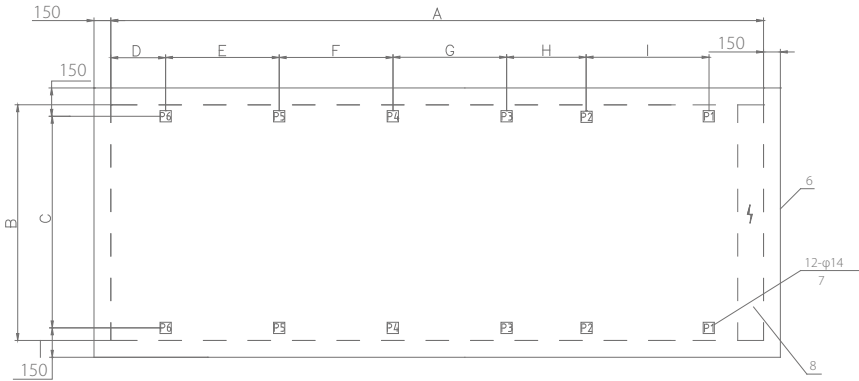


Dimensions (unit: mm)									
Model, ZLAXV	A	B	C	D	E	F	G	H	I
330, 330T, 330RC	10265	2300	2180	1100	2000	2000	2000	1200	1200

Spring isolator at all points						
Model, ZLAXV	P1	P2	P3	P4	P5	P6
330, 330T, 330RC	MHD-1050	MHD-1050	MHD-1050	MHD-1050	MHD-1050	MHD-1050


- Note:
- The spring isolator is optional.
 - The value in the spring isolator model indicates the bearable weight (unit: kg). For example, "1050" in "MHD-1050" indicates 1050kg.

Installation and maintenance



Single installation

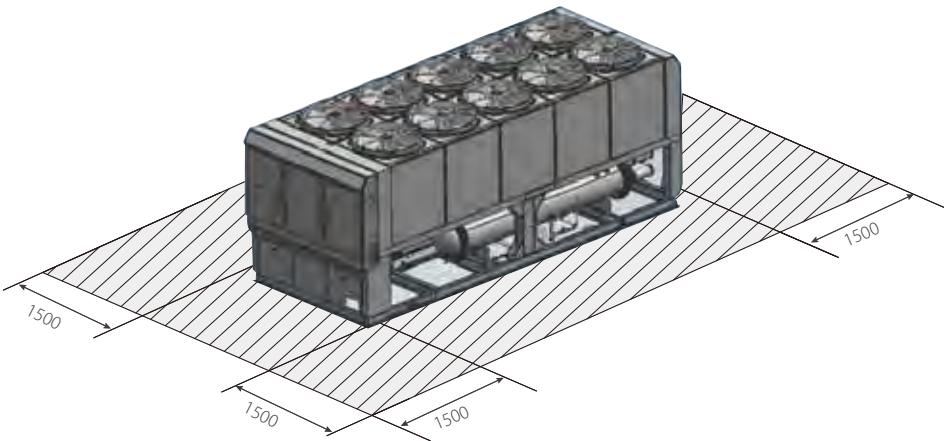

Horizontal placement

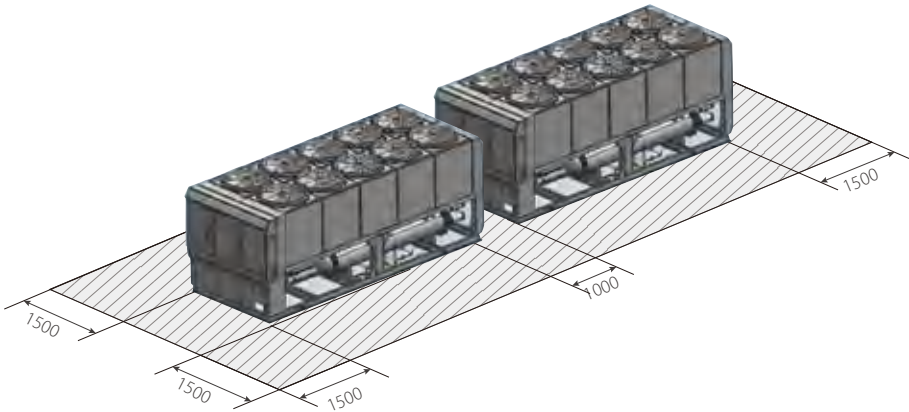

Vertical placement

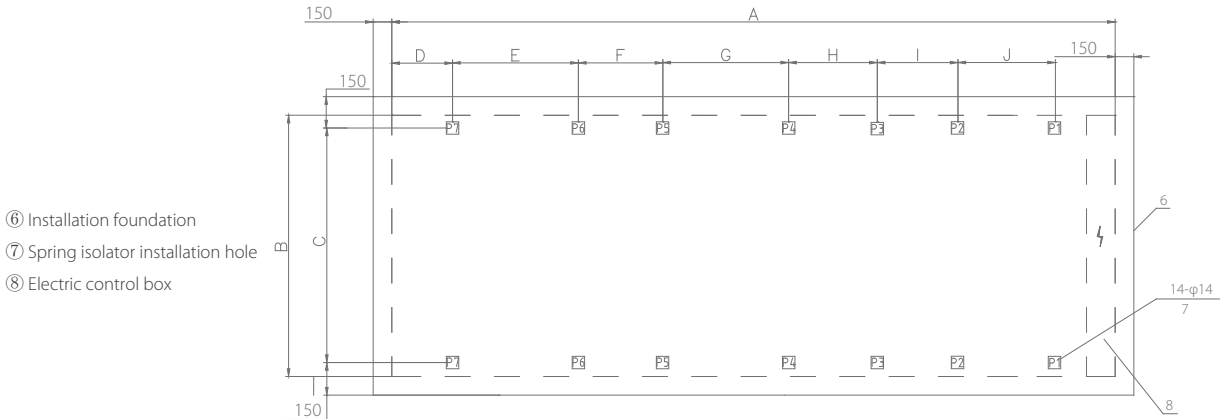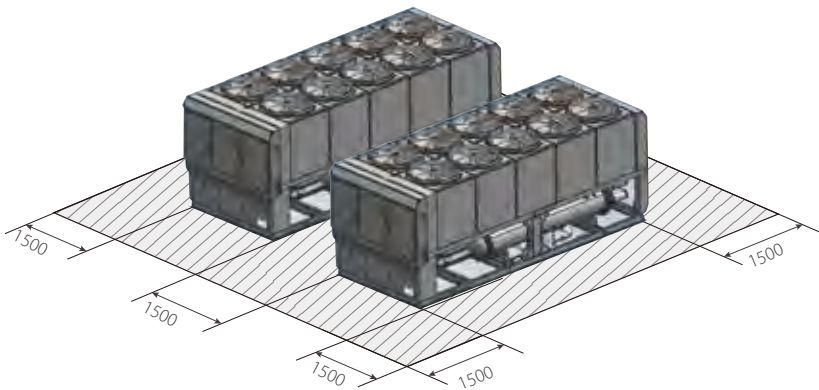

Dimensions (unit: mm)										
Model, ZLAXV	A	B	C	D	E	F	G	H	I	J
385, 385T, 385RC	11270	2300	2180	405	1700	2000	2000	2000	1200	1200
410, 410T, 410RC	11270	2300	2180	405	1700	2000	2000	2000	1200	1200

Spring isolator at all points							
Model, ZLAXV	P1	P2	P3	P4	P5	P6	P7
385, 385T, 385RC	MHD-1050	MHD-1050	MHD-1050	MHD-1050	MHD-1050	MHD-1050	MHD-1050
410, 410T, 410RC	MHD-1050	MHD-1050	MHD-1050	MHD-1050	MHD-1050	MHD-1050	MHD-1050

Note :

1. The spring isolator is optional.

2. The value in the spring isolator model indicates the bearable weight (unit: kg). For example, "1050" in "MHD-1050" indicates 1050kg.

Options

Items	Standard	Optional
Power supply	380V-3Ph-50Hz	50Hz: 400V, 415V; 60Hz: 380V, 400V, 440V, 460V
Water side pressure	1.0MPa	1.6MPa, 2.0MPa
Heavy anti-corrosion treatment	×	√
Communication	Modbus-RTU (RS485 port)	BACnet IP, BACnet MS/TP(RJ-45 port)
Water pipe connection	Victaulic	Flange
Spring isolator	×	√
Water flow switch	×	√
Insulation	20mm	40mm
Super low noise fan	×	√
Double layer compressor sound insulation material	×	√
Hydraulic module	×	√ (external)
High water outlet temperature (cooling)	5~15℃	15~20℃
Large temperature difference	×	8~10℃
Inverter fan	×	√
Free cooling	×	√
T3 series	×	√
All year round cooling	×	√(-20℃)
Vessel code	GB	ASME
Remote control panel	×	√
ZERO Chiller Plant Control	×	√
ZERO smart cloud platform	×	√
QuickView	×	√

Note: for other options, please contact with our engineers.

Intelligent management

ZERO Chiller Plant Control

ZERO Chiller Plant Control is a group control system for commercial air conditioning that includes air conditioners, water pumps, cooling towers, terminals and related ancillary equipment (including valves, sensors etc.) as the underlying control objects. Based on a powerful control logic program and communication network, it establishes a 3-layer control framework that integrates the equip-ment, control and management layers. **ZERO** Chiller Plant Control contains a unique operation module from **ZERO** that is designed to save energy, so in addition to automated stable operations for the various devices, this product also improves and optimizes user management capabilities, reduces labour costs, boosts operational efficiency and lowers the overall energy consumption for commercial air conditioning.

